


Modification Career

| NO: | Modification | Modified by | Approved by | Date |
|-----|--------------|-------------|-------------|------|
|     |              |             |             |      |
|     |              |             |             |      |

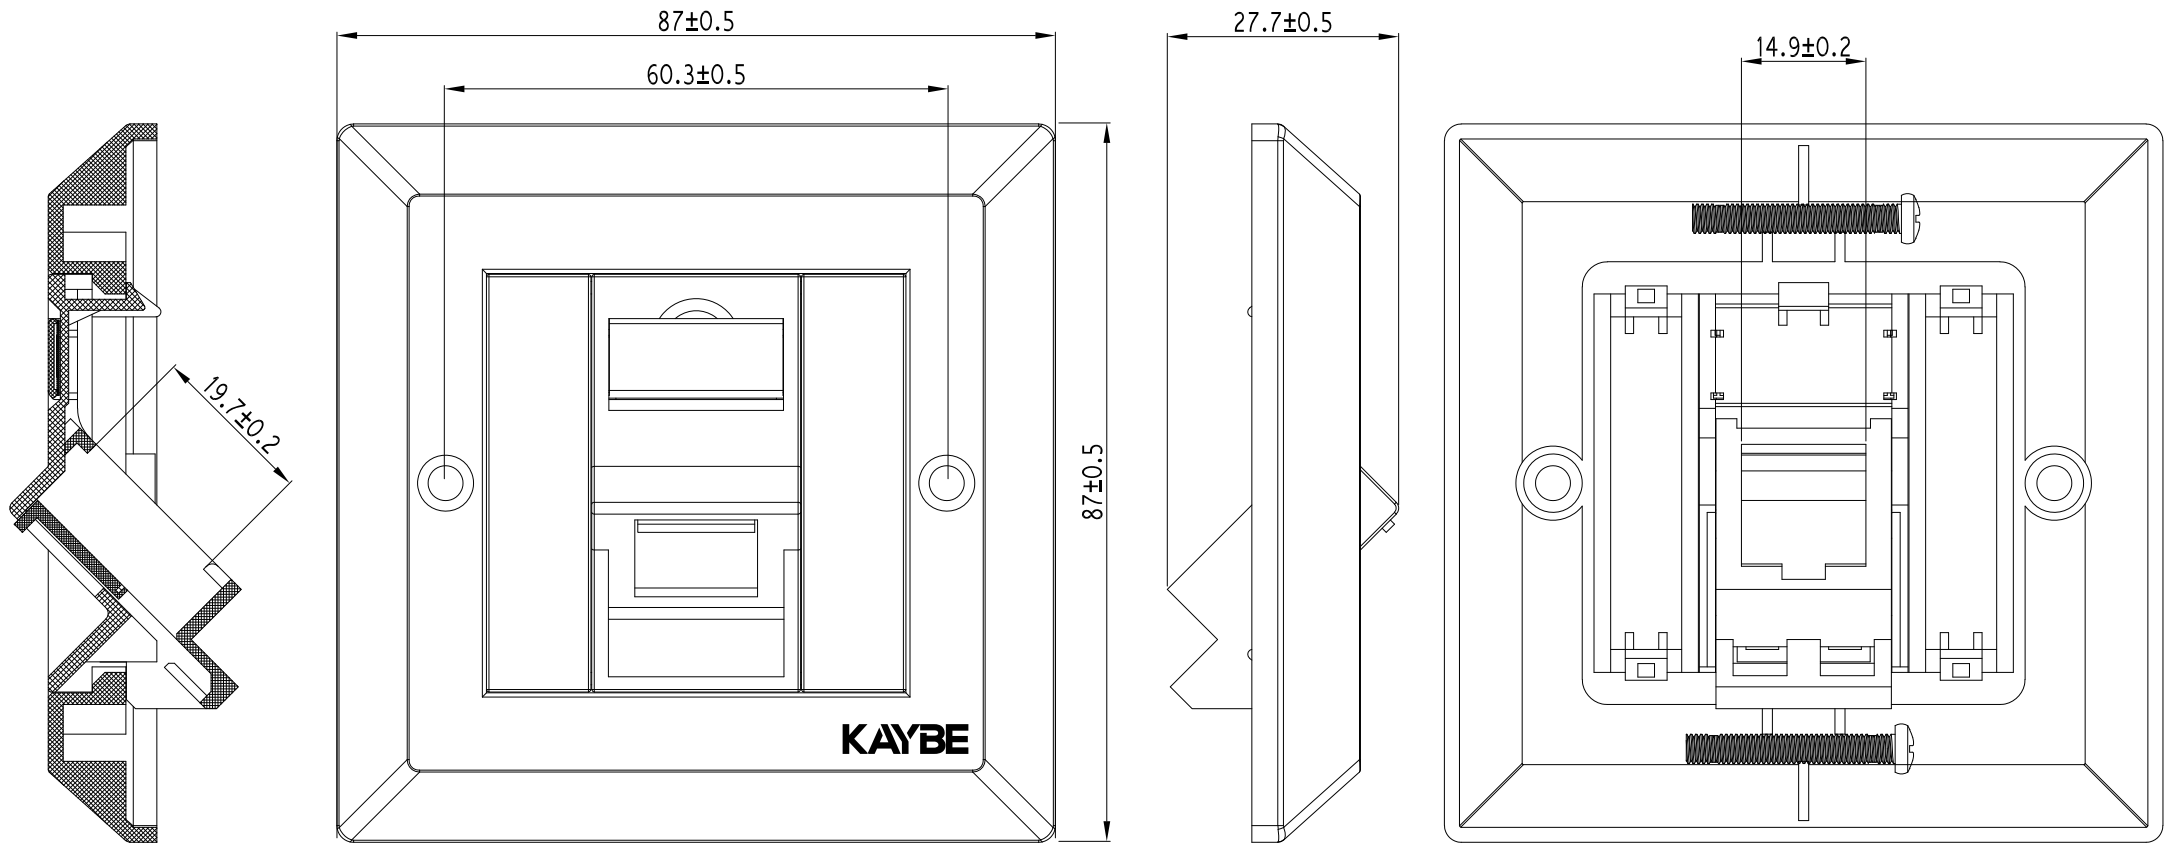

NOTES:

ENVIRONMENTAL:



1. Operating temperature range :-10°C-+60°C
2. Storage temperature range :-40°C-70°C
3. Operating humidity range:10%-90%

MECHANICAL:

1. Plastic parts: high quality engineering plastic



**KAYBE®**  
Right transmission for the future

|   |  |   |    |          |  |   |       |
|---|--|---|----|----------|--|---|-------|
| <br>Right transmission for the future |  | Unit  | mm | Client   |  | Tolerances  |       |
|   |  | REV   |    | Weight   |  |   |       |
|   |  | Scale   |    | Material |  | .X  | ±0.1  |
|   |  | Product NO:                                       |    |          |  | .XX   | ±0.05 |
| Designed by   |  | BFP21AW   |    |          |  | Angle   | ±0.5° |
| Verified by   |  | Description:<br><br>Single Port Shuttered against |    |          |  | First angle projection<br> |       |
| Approved by   |  |   |    |          |  |   |       |