

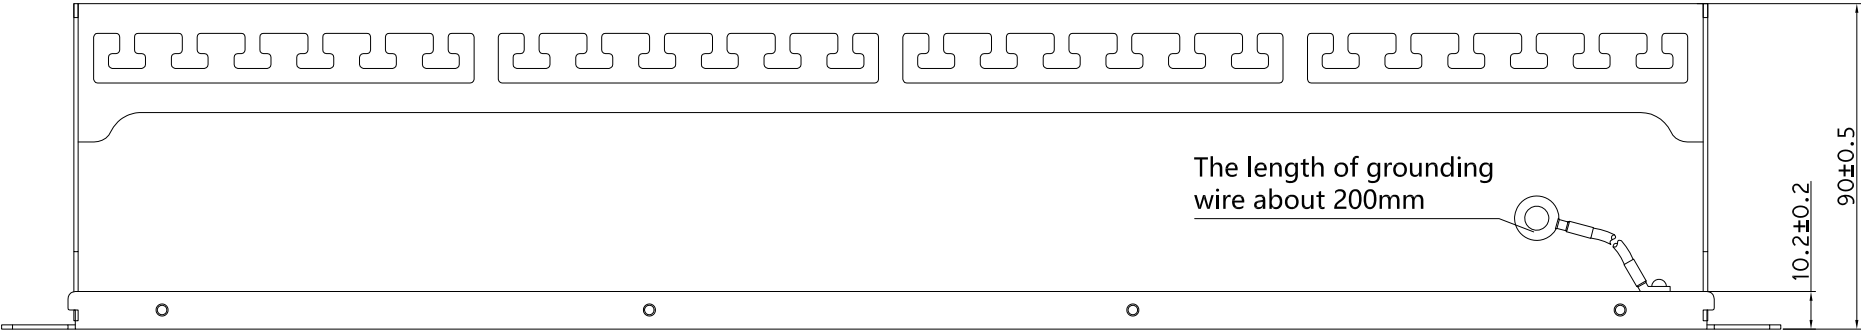


Modification Career				
NO :	Modification	Modified by	Approved by	Date

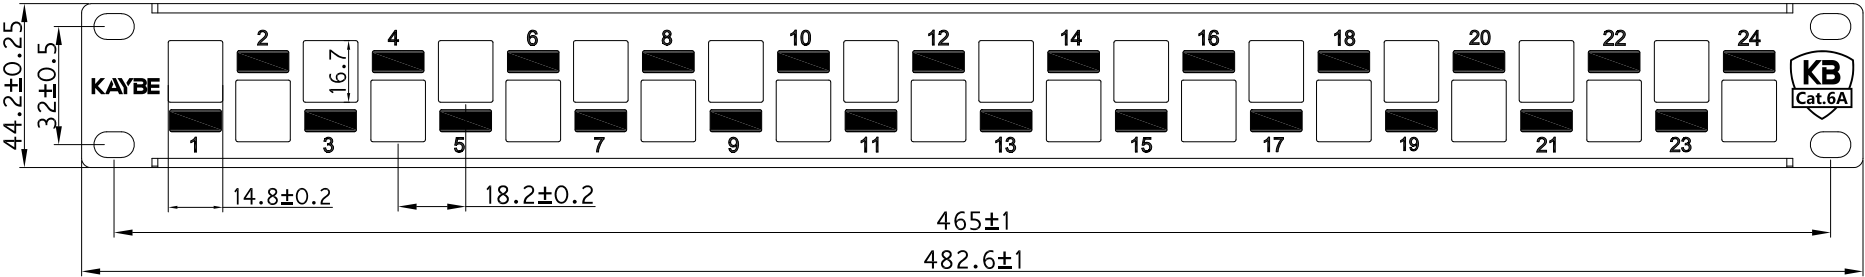


NOTES:

ENVIRONMENTAL:

1. Operating temperature range :-10°C-+60°C
2. Storage temperature range :-40°C-70°C
3. Operating humidity range:10%-90%

MECHANICAL:

1. Front Fram: Cold-rolled stell, SPCC,T=1.5mm,with plastic powder plating,RAL9004
2. Back Fram and Cable Holder:Cold-rolled stell, SPCC,T=1.5mm,with Nickel plating

 KAYBE® Right transmission for the future		Unit	mm	Client		Tolerances	
		REV		Weight			
		Scale		Material		.X	±0.1
		Product NO:				.XX	±0.05
Designed by		BC6ABPP24T2				Angle	±0.5°
Verified by		Description:				First angle projection	
Approved by							
		CAT6A 24PORT UN-LOADED PATCH PANEL				